


1

Strip and prepare Cable.

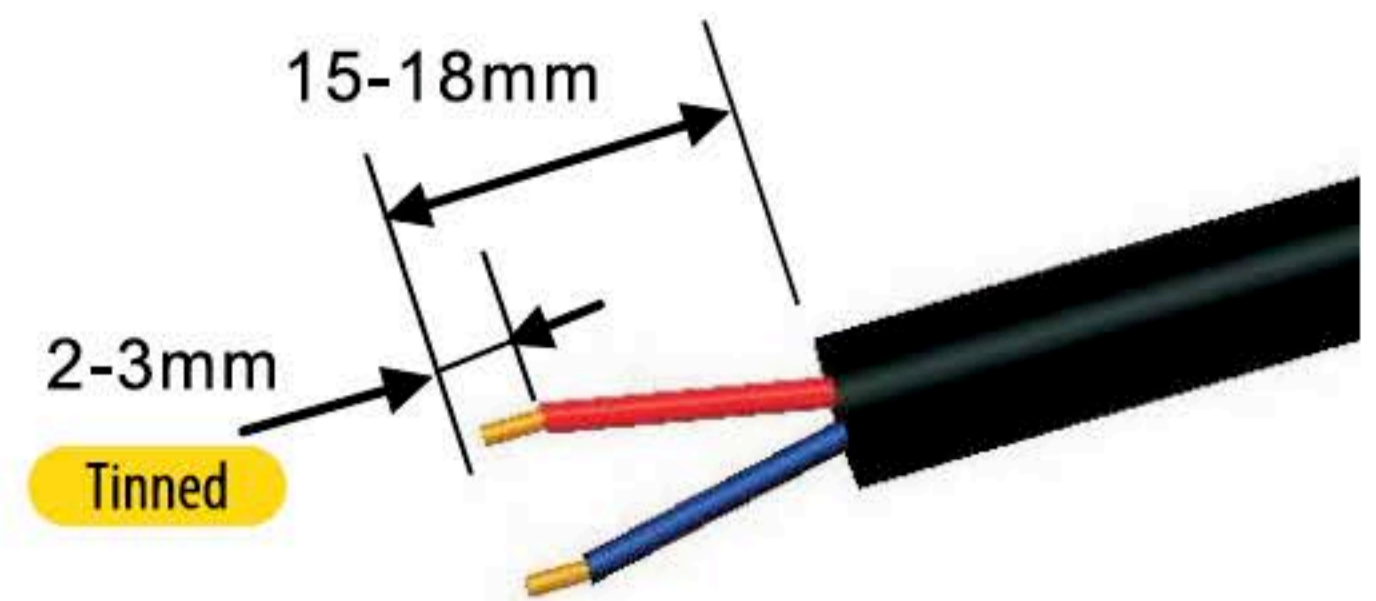

2

Thread Seals Nut, Seals Ring, Clamp Ring and O-Ring onto the cable.



3

Solder wire.



4

Assemble O-Ring into Clamp ring.



5

Assemble Clamp Ring to Housing.



6

Put Seals Ring to the Clamp Ring.



7

Assemble Seals Nut and Clamp Ring.

